


FoamArt FG

Acoustic Foam

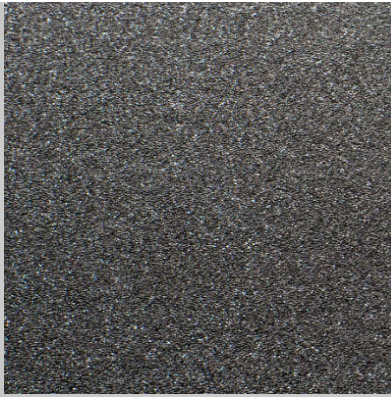

Description

FoamArt FG is a polyurethane based sound absorbing foam. Although this material is mostly used as a sound absorbent component of wall and ceiling panels, it can be placed inside any surface cavity (air gap) to improve its sound reduction levels.


Technical Information

	Value	Standard
Dimensions [mm]	595 x 595*	-
Thickness [mm]	20/40**	-
Density [kg/m³]	25 (± 2)	-
Tensile Strength [kPa]	> 130	ISO 1798
Elongation at Break [%]	> 120	ISO 1798
Combustibility [mm/min]	< 100	ISO 3795

* Also available in 1190 x 595 panels or other dimensions, upon request.

** Also available in other thicknesses, upon request.

Acoustic Performance

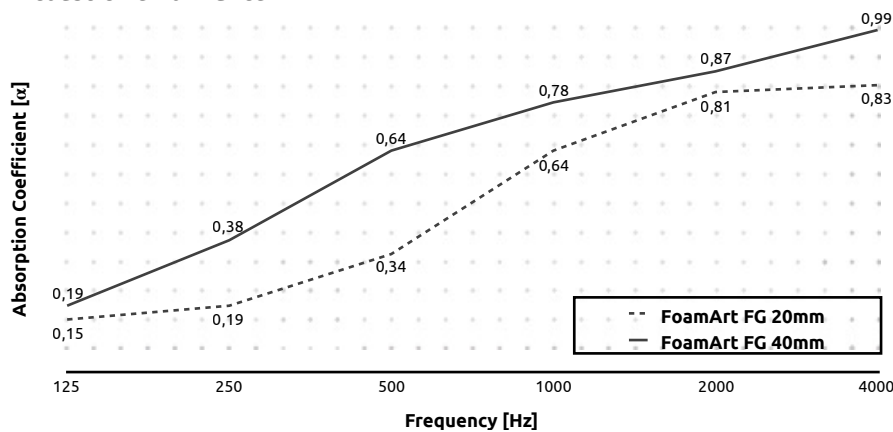

Specifications

Material:

Polyurethane Foam

Dimensions:

- 595 x 595 x 20 (mm)
- 595 x 595 x 40 (mm)
- 1190 x 595 x 20 (mm)
- 1190 x 595 x 40 (mm)

Installation:

Mechanical / Chemical

Packaging

Dimensions:

- 595 x 595 units
640 x 365 x 640 (mm)
- 1190 x 595 units
1235 x 250 x 640 (mm)

595 x 595 units per box:

- 20mm (18 units)
- 40mm (9 units)

1190 x 595 units per box:

- 20mm (12 units)
- 40mm (6 units)

595 x 595 units box:

weight: **1,15 kg**

1190 x 595 units box:

weight: **1,53 kg**



hello@artnovion.com

www.artnovion.com